


Model 1030

Single Point Load Cells

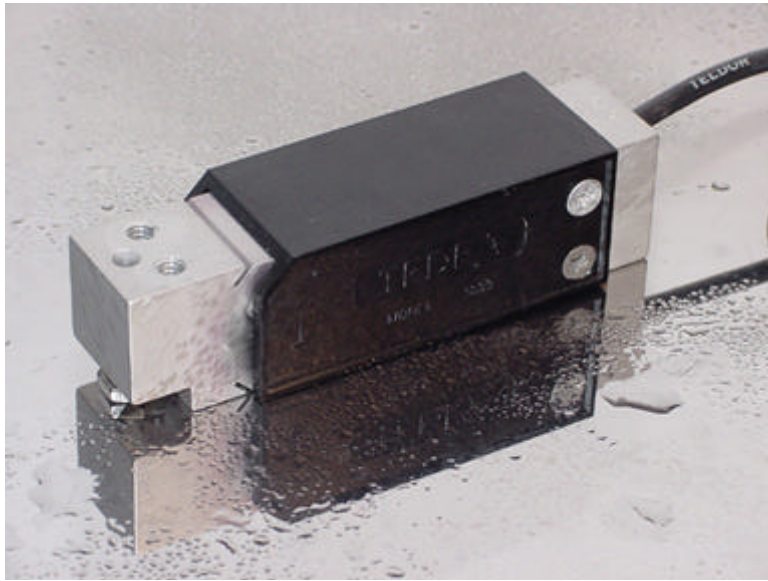

Features

- Capacities: 2 kg - 15 kg (4.41 lbs - 33.07 lbs)
- Anodized aluminum construction
- Single point 350 mm x 350 mm (13.78 inch x 13.78 inch) platform
- 6 wire (sense) circuit
- Adjustable overload protection
- OIML R60 approved

Model 1030 is a single point load cell designed for direct mounting of low cost, low capacity weighing platforms.

Its use in relatively large platforms, combined with high accuracy and low cost, makes this load cell ideally suited for a wide range of weighing applications, including bench scales, laboratory, money counting and process weighing.

A special humidity resistant protective coating is available as an option which assures long term reliability.

Model 1030's built-in overload stop can provide mechanical protection against overloading.

The two additional sense wires feed back the voltage reaching the load cell. Complete compensation of changes in lead resistance due to temperature change and / or cable extension, is achieved by feeding this voltage into the appropriate electronics.

Also Available from Tedeo-Huntleigh

The model 1030 is sealed as standard to IP65, an IP67 version is also available for more demanding applications.

A balanced bridge version of the model 1030 is available, designated model 1035.

Higher capacity single point load cells are available from Tedeo-Huntleigh.

For further details please contact Tedeo-Huntleigh or your local distributor.



EXCELLENCE IN LOAD CELLS

Contact Info

E-mail

sales@tedea-huntleigh.com

Website

www.tedeo-huntleigh.com

20630 PLUMMER STREET
CHATSWORTH, CA 91311
USA

TEL: 800.626.2616
FAX: 818.701.2799

Europe

Tedeo-Huntleigh
Europe Ltd.
37 Portmanmoor
Road
Cardiff
CF24 SHE

International

Tedeo-Huntleigh Inter-
national Ltd.
5 Hozoran St.
New Industrial Zone
P.O. Box 8381, Netanya
42506

China

Beijing Tedeo-Huntleigh
No. 16 Hong Da Bei Lu
Da Xing County, Beijing
Economic & Technology
Development Area,
Beijing 100176

Germany

Tedeo-Huntleigh
GmbH.
Mumlingweg 18
D-64297
Darmstadt-
Eberstadt

France

SEEA sa
16 Rue Francis
Vovelle
28000 Chartres
France



Model 1030

Single Point Load Cells

GRADE	E	F	G**	C2.5***	UNITS
Rated Capacities	2, 3, 5, 7, 10, 15			3, 5, 7, 10, 15	kg
Rated Output	2.0 ± 10%				mV/V
Total Error*	0.030	0.020	0.020	0.020	±% of Rated Output
Zero Return after 30 mins	0.050	0.025	0.017	0.017	±% of Rated Output
Temperature Effect : On Output	0.003	0.0014	0.0010	0.0010	±% of Applied Load / °C
Temperature Effect : On Zero	0.010	0.0060	0.0040	0.0028	±% of Rated Output / °C
Eccentric Loading Error	0.0085	0.0085	0.0057	0.0057	±% of Rated Output
Zero Balance	10.0				±% of Rated Output
Temperature range : Operating	-30 to +70				°C
Temperature range : Compensated	-10 to +40				°C
Safe Overload	150				% of Rated Capacity
Ultimate Overload	300				% of Rated Capacity
Excitation: Recommended	10				Volts AC or DC
Excitation: Maximum	15				Volts AC or DC
Input Impedance	415 ± 15				Ohms
Output Impedance	350 ± 3				Ohms
Insulation Impedance	>5000				Mega Ohms
Deflection at Rated Capacity	<0.4				mm
Weight	0.3				kg
Construction	Anodized Aluminum				
Compensation Circuit Type	Unbalanced				
Environmental Protection	IP65 (IP67 Optional)				
Cable	1 Meter (Standard), 6 Wire, PVC Jacket, Floating Screen				
Approvals	OIML R60				

* Total Error - According to OIML R60 **Standard 70% utilization ***Standard 50% utilization - Other utilization factors available on request.

Outline Dimensions All Capacities (in mm)

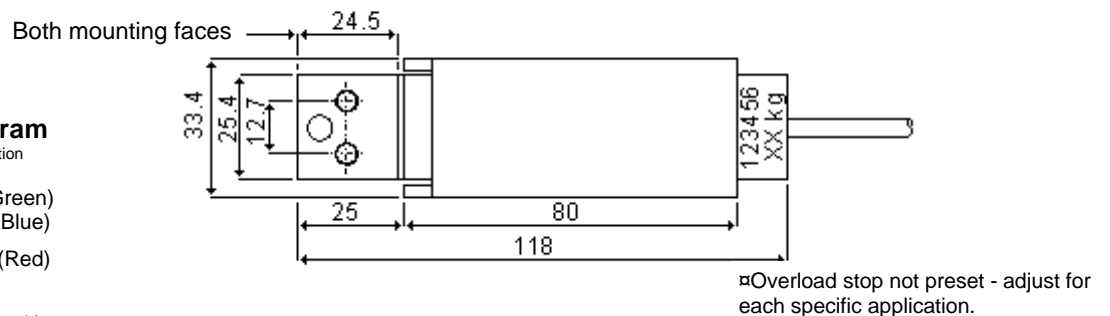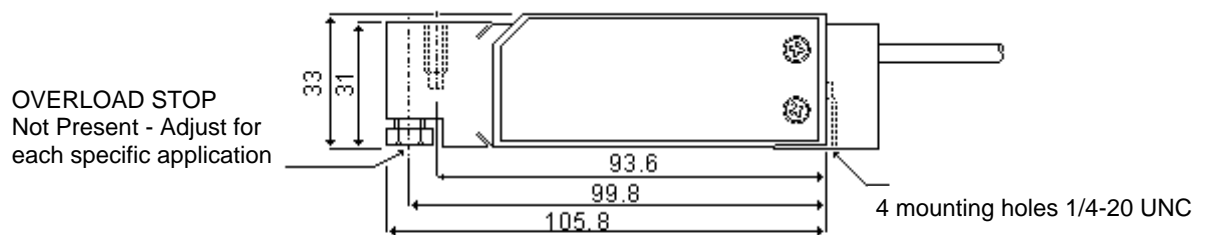

Wiring Schematic Diagram

Unbalanced Temperature Compensation

