


Single Point Load Cell

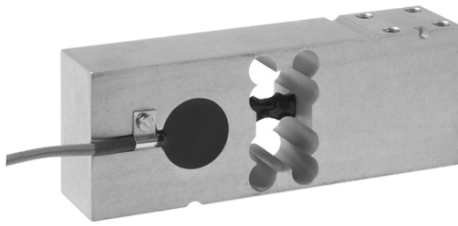

FEATURES

- Capacity range: 100 to 660 kg
- Rigid, anodized aluminum construction
- OIML approved to C6 (150 - 660 kg)
- Single point 800 x 800 mm platform
- Minimal deflection and high natural frequency
- Sealed to IP66

OPTIONAL FEATURES

- 2G EEx ia IIC T4 - ATEX hazardous area approval
- UNC threads
- Sealing to IP67 with encapsulation protection

DESCRIPTION

Model 1265 is an anodized aluminum single point load cell suitable for direct mounting with large platforms, check weighers, and a wide range of other applications.

A unique rigid design allows for low deflection and high natural frequency, making the 1265 suitable for dynamic applications such as Check Weighers.

This load cell supports large platforms up to 800 x 800 mm. High accuracy (6000d) is maintained for overall characteristics (OIML R60) and for eccentric loading (OIML R76).

A humidity-resistant protective coating assures stable operation in damp environments over the entire compensated range and conforms to IP66 (IEC 60529).


For very humid environments, an IP67 rated encapsulated protection is available. Also available is an ATEX 2G EEx ia IIC T4 approved version for hazardous areas.

The six-wire cable includes two sense wires that compensate for changes in lead resistance due to temperature changes and cable extension.

APPLICATIONS

- Platform scales
- Bag fillers
- Check weighers
- Overhead track scales
- Process weighing

OUTLINE DIMENSIONS in millimeters

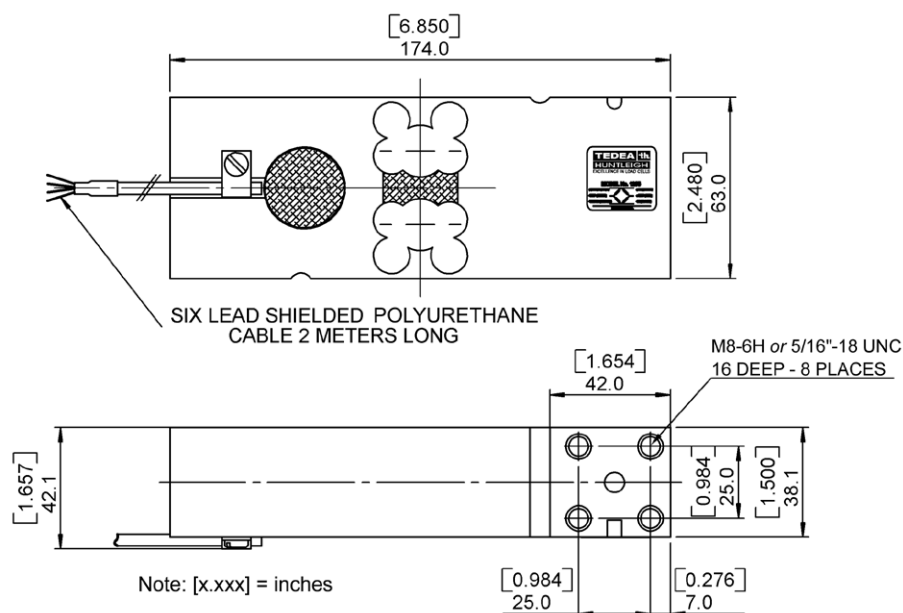


SPECIFICATIONS

PARAMETER	VALUE			UNIT
NTEP/OIML Accuracy class	Non-Approved	C3*	C6**	
Maximum no. of intervals (n)	1000	3000	6000	
$Y = E_{\max}/V_{\min}$	2000	15000	15000	Maximum available
Rated capacity-R.C. ($E_{\max}$)	100, 150, 200, 250, 300, 500, 600, 635, 660			kg
Rated output-R.O.	2.0			mV/V
Rated output tolerance	0.2			± mV/V
Zero balance	0.2			+ mV/V
Zero Return, 30 min.	0.0300	0.0170	0.0083	± % of applied load
Total Error	0.0500	0.0200	0.0100	± % of rated output
Temperature effect on zero	0.0100	0.0023	0.0024	± % of rated output/°C
Temperature effect on output	0.0300	0.0010	0.00058	± % of applied load/°C
Eccentric loading error	0.0085	0.0049	0.0024	± % of rated load/cm
Temp. range, compensated	-10 to +40			°C
Temp. range, safe	-20 to +70			°C
Maximum safe central overload	150			% of R.C.
Ultimate central overload	300			% of R.C.
Excitation, recommended	10			Vdc or Vac rms
Excitation, maximum	15			Vdc or Vac rms
Input impedance	415 ± 15			Ohms
Output impedance	351 ± 5			Ohms
Insulation resistance	> 2000			Mega-Ohms
Cable length	1.5			m
Cable type	6 wire, PVC, single floating screen			Standard
Construction	Plated (anodized) aluminum			
Environmental protection	IP66 (IP67 optional)			
Platform size (max)	800 x 800			mm
Recommended torque	100-300 kg - 25.0 500-660 kg - 30.0			N*m

* 50% utilization

** 60% utilization, and for capacities 150kg and up

Wiring Schematic Diagram
(Balanced bridge temperature compensation)



VISHAY TRANSDUCERS (VT) SALES OFFICES

VT Americas
Covina, CA

PH: +1-626-858-8899
FAX: +1-626-332-3418
vt.us@vishaymg.com

VMG France
Chartres

PH: +33-2-37-33-31-20
FAX: +33-2-37-33-31-29
vt.fr@vishaymg.com

VT Canada
Toronto

PH: +1-416-251-2554
FAX: +1-416-251-2690
vt.can@vishaymg.com

VMG Iberica
Madrid

PH: +34-91-7218890
FAX: +34-91-7219056
vt.es@vishaymg.com

VMG UK
Basingstoke

PH: +44-125-646-2131
FAX: +44-125-647-1441
vt.uk@vishaymg.com

VMG Israel
Netanya

PH: +972-9-863-8888
FAX: +972-9-863-8800
vt.il@vishaymg.com

VT Sweden
Karlskoga

PH: +46-586-630-00
FAX: +46-586-630-99
vt.se@vishaymg.com

VT China
Tianjin

PH: +86-22-2835-3503
FAX: +86-22-2835-7261
vt.prc@vishaymg.com

VMG Germany
Heilbronn

PH: +49-7131-3901-260
FAX: +49-7131-3901-2666
vt.de@vishaymg.com

VT Taiwan*
Taipei

PH: +886-2-2696-0168
FAX: +886-2-2696-4965
vt.roc@vishaymg.com
*Asia except China